




AUTOMATIC FIRE EXTINGUISHING SYSTEMS



DEFLECTOR

- The deflector is the main part that provides 360° distribution of the extinguishing agent inside the vehicle.
- After the activation of the cylinders, the active substance is dispersed quickly and effectively with the help of deflectors.
- According to the position of the tubes in the vehicle, the dispersion direction can be adjusted up and down.
- Weight: 390g ± 50g

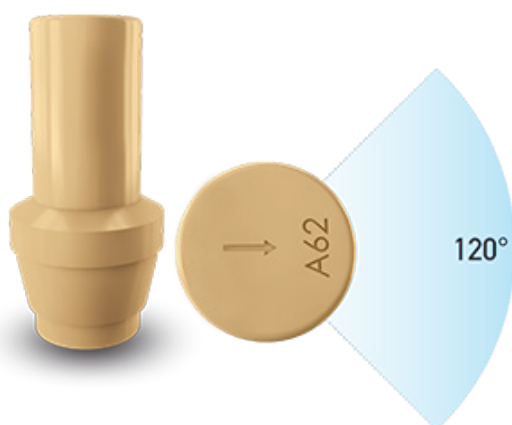

Extinguisher Spring Angle

NOZZLE

- The viewing angle is between 90 and 180 degrees.
- Inner diameter is 5 millimeters.
- Dispersion rate is 50 - 60 liters/minute
- The material type is 304 stainless or brass.
- It is corrosion resistant
- Easy direction adjustment with the symbol arrow on the front.
- Weight: 20 g ± 5

Nozzle Code	Nozzle Name	Orifis (mm)	Extinguisher Spring Angle
NE-P-44706	A51	5	90°
NE-P-44707	A52	5	120°
NE-P-44708	A53	5	150°
NE-P-44709	A54	5	180°
NE-P-44710	A61	6	90°
NE-P-44711	A62	6	120°
NE-P-44712	A63	6	150°
NE-P-44713	A64	6	180°
NE-M-21422	ENGINE NOZZLE ALU	3/8 INC (9,525 mm)	FULL CONE 120°
NE-M-21315	TIRES NOZZLE ALU	3/8 INC (9,525 mm)	FULL CONE 120°